

1x38 W **Constant Current** LED driver

38 W 220-240 VAC 50-60 Hz

- Open & short circuit protection
- Selectable constant current outputs: 300 mA and 350 mA
- Maximum 38.5 W load
- Suitable for Class I luminaires
- Load output is basic insulated from the mains
- Protected up to 4 kV power network fast transients



Mains Characteristics

Voltage range	198-264 VAC, Min 176 VAC (max 1 hour)
DC range	176 - 280 VDC, Starting voltage > 190 VDC
Max mains current at full load	0.17-0.23 A
Frequency	0 / 50 - 60 Hz
U-OUT _{max} (abnormal)	160V

Operating Conditions and Characteristics

Max. temperature at Tc point	80 °C
Ambient temperature range	-20...+50 °C
Storage temperature range	-40...+80 °C
Maximum relative humidity	No condensation
Life time	50 000 h, at Tc 80 70 000 h, at Tc 75 100 000 h, at Tc 70 (90 % survival rate)

Load Output (Basic (galvanic) isolation)

Output current (I-OUT)	300 mA or 350 mA
Max output power	38.5 W
Efficiency, at full load, typical	≥ 0.89

	I-OUT 300 mA	350 mA
P-out (max)	36 W	38.5 W
U-OUT	70 - 120 V	70-110 V
λ	0.98	0.98
Efficiency (η) @ max	0.89	0.89

Conformity & standards


General and safety requirements	EN 61347-1
Particular safety requirements for DC or AC supplied electronic control gear for LED modules	EN 61347-2-13
Thermal protection class	EN61347, C5e
Mains current harmonics	EN 61000-3-2
Limits for Voltage Fluctuations and Flicker	EN 61000-3-3
Radio Frequency Interference	EN 55015
Immunity standard	EN 61547
Performance requirements	EN 62384
Compliant with relevant EU directives	
CE marked	

Connections and Mechanical Data

Wire size	0.5 - 1.5 mm ²
Wire type	Solid core and fine-stranded
Wiring insulation	According to EN 60598
Maximum driver to LED wire length	1 m
Weight	165 g
IP rating	IP20

Note: See page 2 for dimensions and additional information

T22 070 1A 13.03.2017 1/3

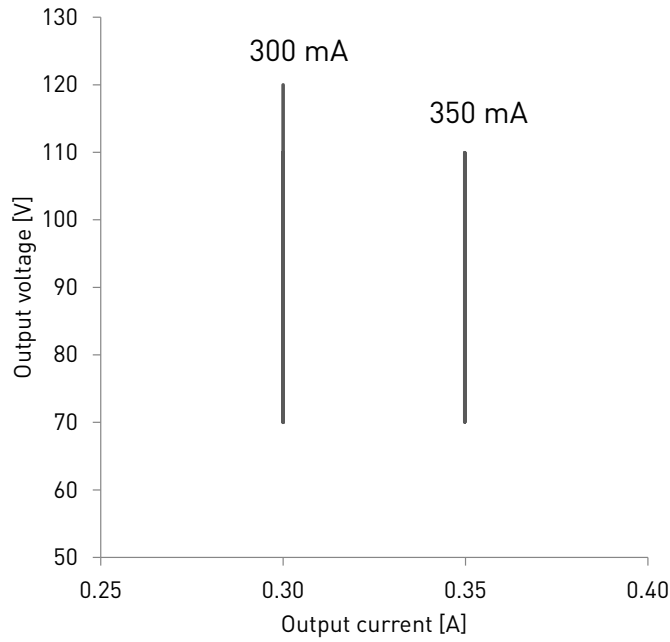

Connections

Helvar
helvar.com

LED Driver
LL1x38-CC
220-240V 0/50-60Hz
Basic (Galvanic) Isolation

I-OUT	300mA	350mA
λ	0.98	0.98
U-OUT	70...110V	70...110V
U-OUT _{MAX}	160V	
P-OUT _{MAX}	38.5W	
t_a	-20...+50°C	
t_c	+80°C	

Emergency supply voltage range 176...280V. See datasheet for details.

0,5...1,5F
9 mm


ERC
130

$I_{fv} = 300/350 \text{ mA}$

Note:
 • Not suitable for load side switching operation.

Quantity of drivers per miniature circuit breaker 16 A Type C

Based on I_{cont} (pcs.)	Based on I_{peak} (pcs.)	Typ.inrush current I_{peak} (A)	1/2 value time Δt (μs)	Calculated energy $I_{peak}^2 \Delta t$ ($A^2 s$)
56	95	8	28	0.0012

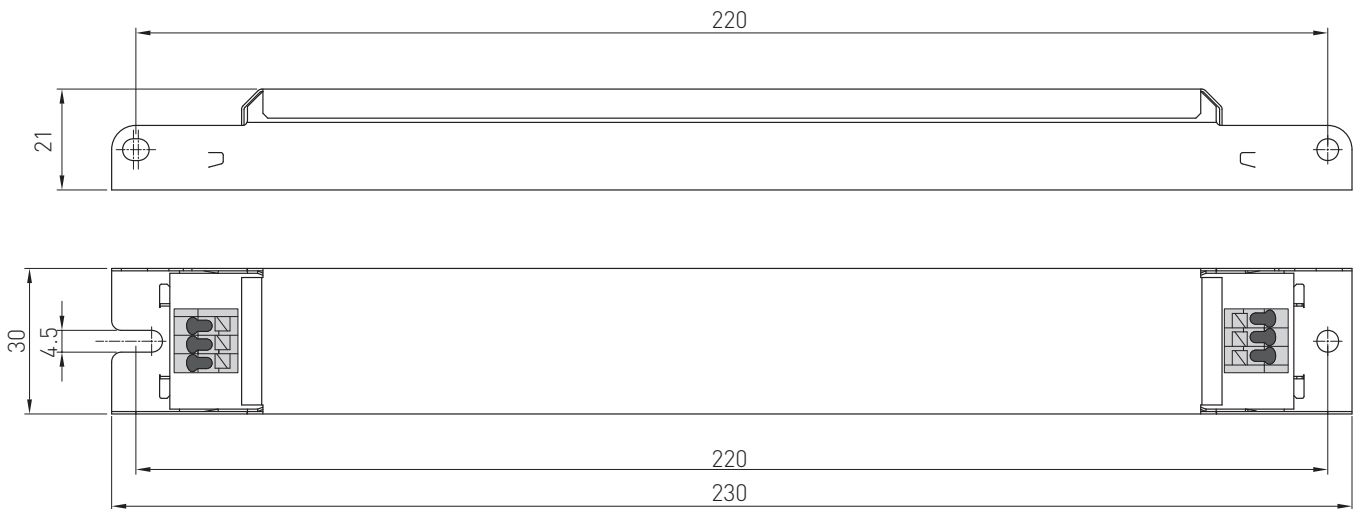

Installation & operation

LL1x38-CC LED driver is suited for in-built luminaire usage. In order to have safe and reliable LED driver operation, the LED luminaires will need to comply with the relevant standards and regulations (e.g. IEC/EN 60598-1). The LED luminaire shall be designed to adequately protect the LED driver from dust, moisture and pollution. The luminaire manufacturer is responsible for the correct choice and installation of the LED drivers according to the application and product datasheets. Operating conditions of the LED drivers may never exceed the specifications as per the product datasheets.

Installation & operational considerations

Maximum Tc temperature

- Reliable operation and lifetime is only guaranteed if the maximum Tc point temperature is not exceeded under the conditions of use.

Miniature Circuit Breakers (MCB)

- Type-C MCB's with trip characteristics in according to EN 60898 are recommended.

LED driver earthing

- LED drivers are designed to support different luminaire classifications, like Class I or Class II fittings (no earth required). Please check the individual LED driver type for its exact safety class rating.
- For Helvar LED drivers to have a reliable operation and EMC performance, the luminaires are expected to have an earth connection.

Company Address:

Helvar Oy Ab

Keilaranta 5

FI-02150, Espoo