



Cable for PanelReady solution

- DC5.5 cable for PanelReady solutions
- Both female and male cable versions available
- Available as accessory for PanelReady applications. See [www.https://helvar.com/fi/luminaire-components/panelready](https://helvar.com/fi/luminaire-components/panelready) for more details.

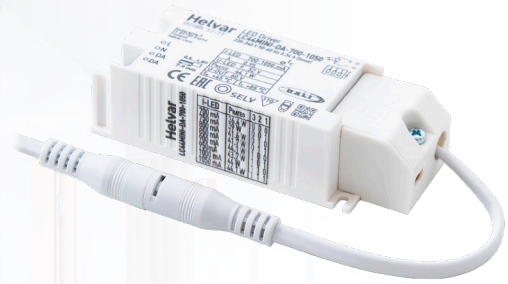


DIMENSIONS

Female cable

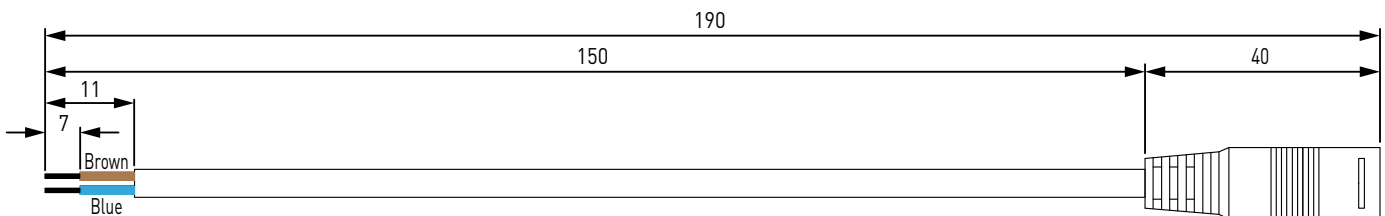

Male cable

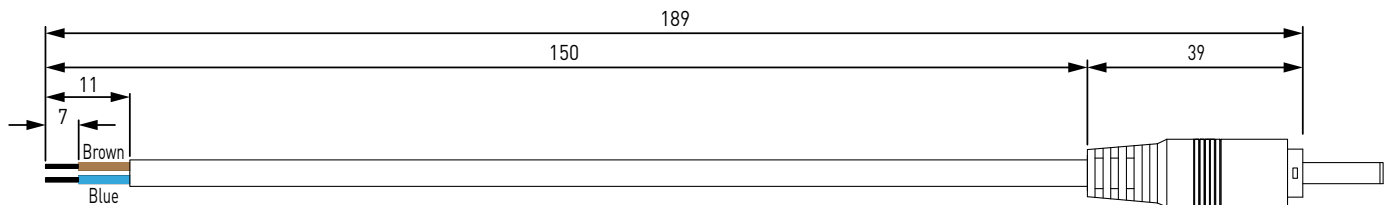

Tolerance for dimensions ± 5 mm.

MATERIALS AND CONDITIONS

Material Specifications

Cable type	VDE H03VVH2-F 2*0.75 mm ²
Insulating material	PVC
Conductor material	Copper
Flame retardant rating	C2, NF C 32-070
Colour	White

Mechanical, Operating & Storage Conditions

Cross section of conductor	0.75 mm ²
Maximum voltage	300 V
Maximum current	6 A
Operating & installation temperature	-10...+50 °C